


CZAJKOWSKI STK

300 / 400

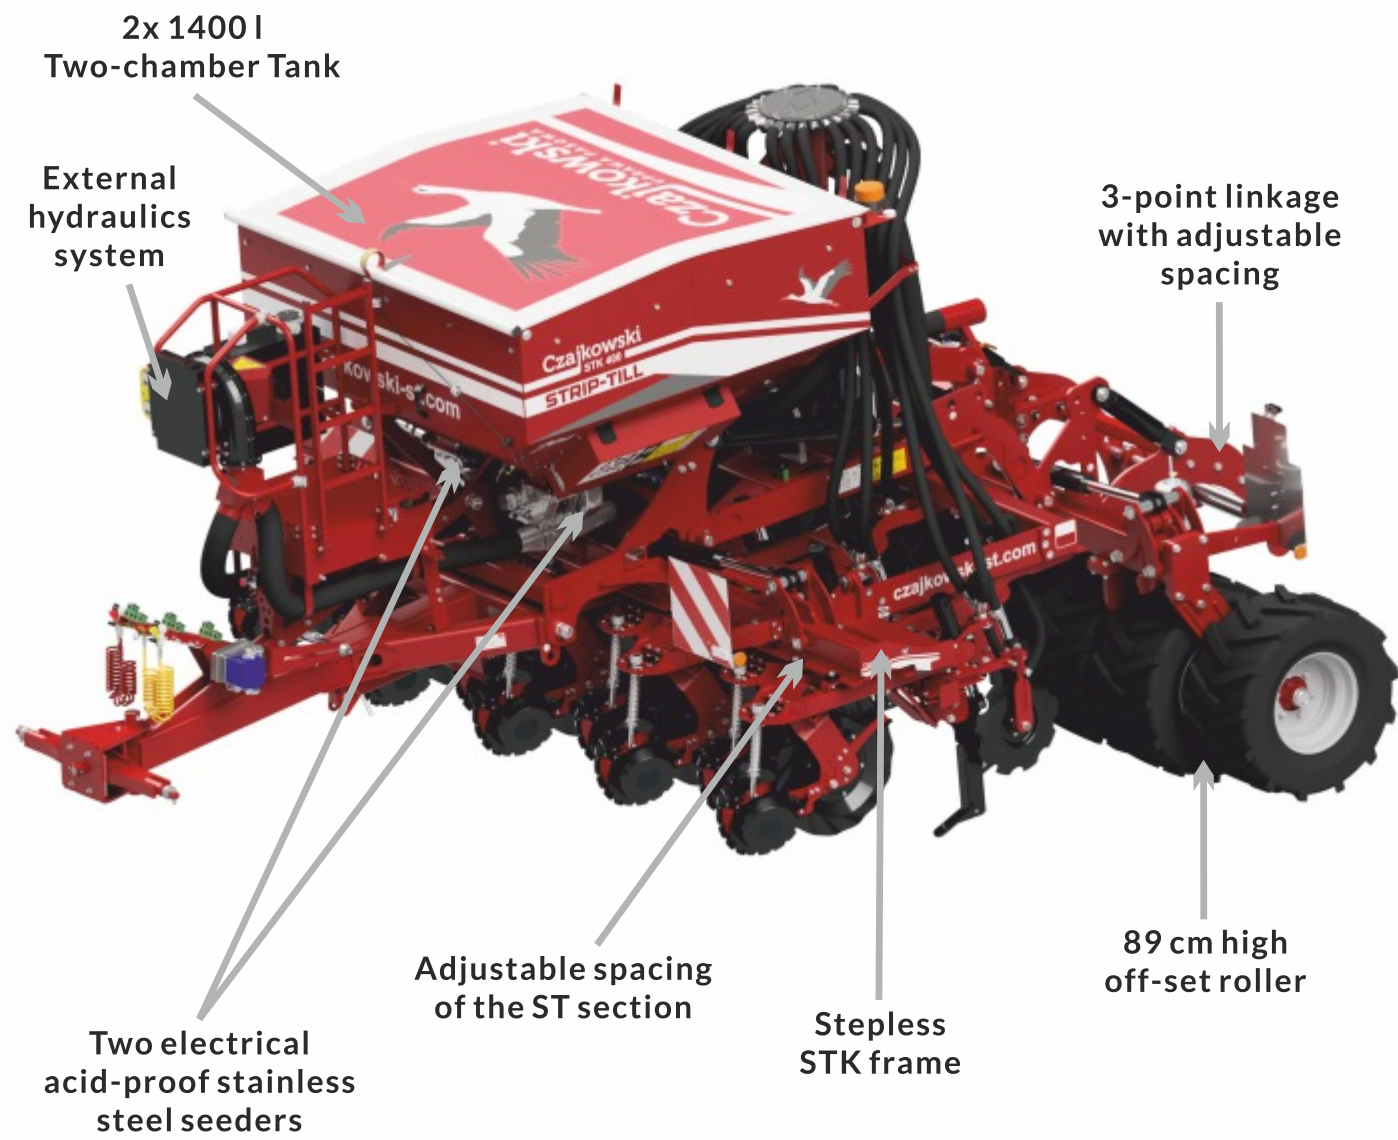

STK 300

STK 400

TECHNICAL SPECIFICATION

Spacing	STK 300	STK 400
8 x 37,5 cm (grains, rapeseed)	☒	☒
6 x 45 cm (beet, rapeseed)	☒	☒
6 x 50 cm (soybean)	☒	☒
4 x 75 cm (maize, sunflower)	☒	☒
6 x 70 cm / 6 x 75 cm (maize, sunflower)	☐	☒
9 x 44,4 cm (grains, rapeseed)	☐	☒
7 x 44,4 cm (grains, rapeseed)	☒	☒

☐ - option *Plus*

Tank capacity (l)	2 x 1400	
Tank filling height (m)	2,6	
Number of scarifying sections	from 4 to 9	
Spacing of scarifying sections (cm)	stepless	
Working depth (cm)	from 20 to 35	
Minimum power supply (HP)	160	180
Roller Ø (cm)	89	
Seeders	2 x electrical	
Hydraulic connectors	3 or 4 pairs + slow flow	
Rear three-point linkage (lifting)	cat II or cat. III (3500 kg)	
Rear PTO	hydraulic	
Power supply	12 V	
Lights	LED	
Video camera (pcs.)	from 1 to 2	
Hydraulic filter (pcs.)	2	
Hitch type	beam, cat. III	
Transport width (m)	3	
Transport height (m)	3,1	
Transport length (m)	6,4	
Weight (kg)	4500-5500	5000-6500