



CZAJKOWSKI ST

300 / 400 / 450 / 600

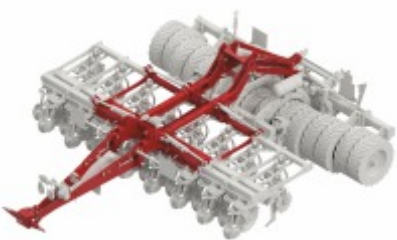

ST 300

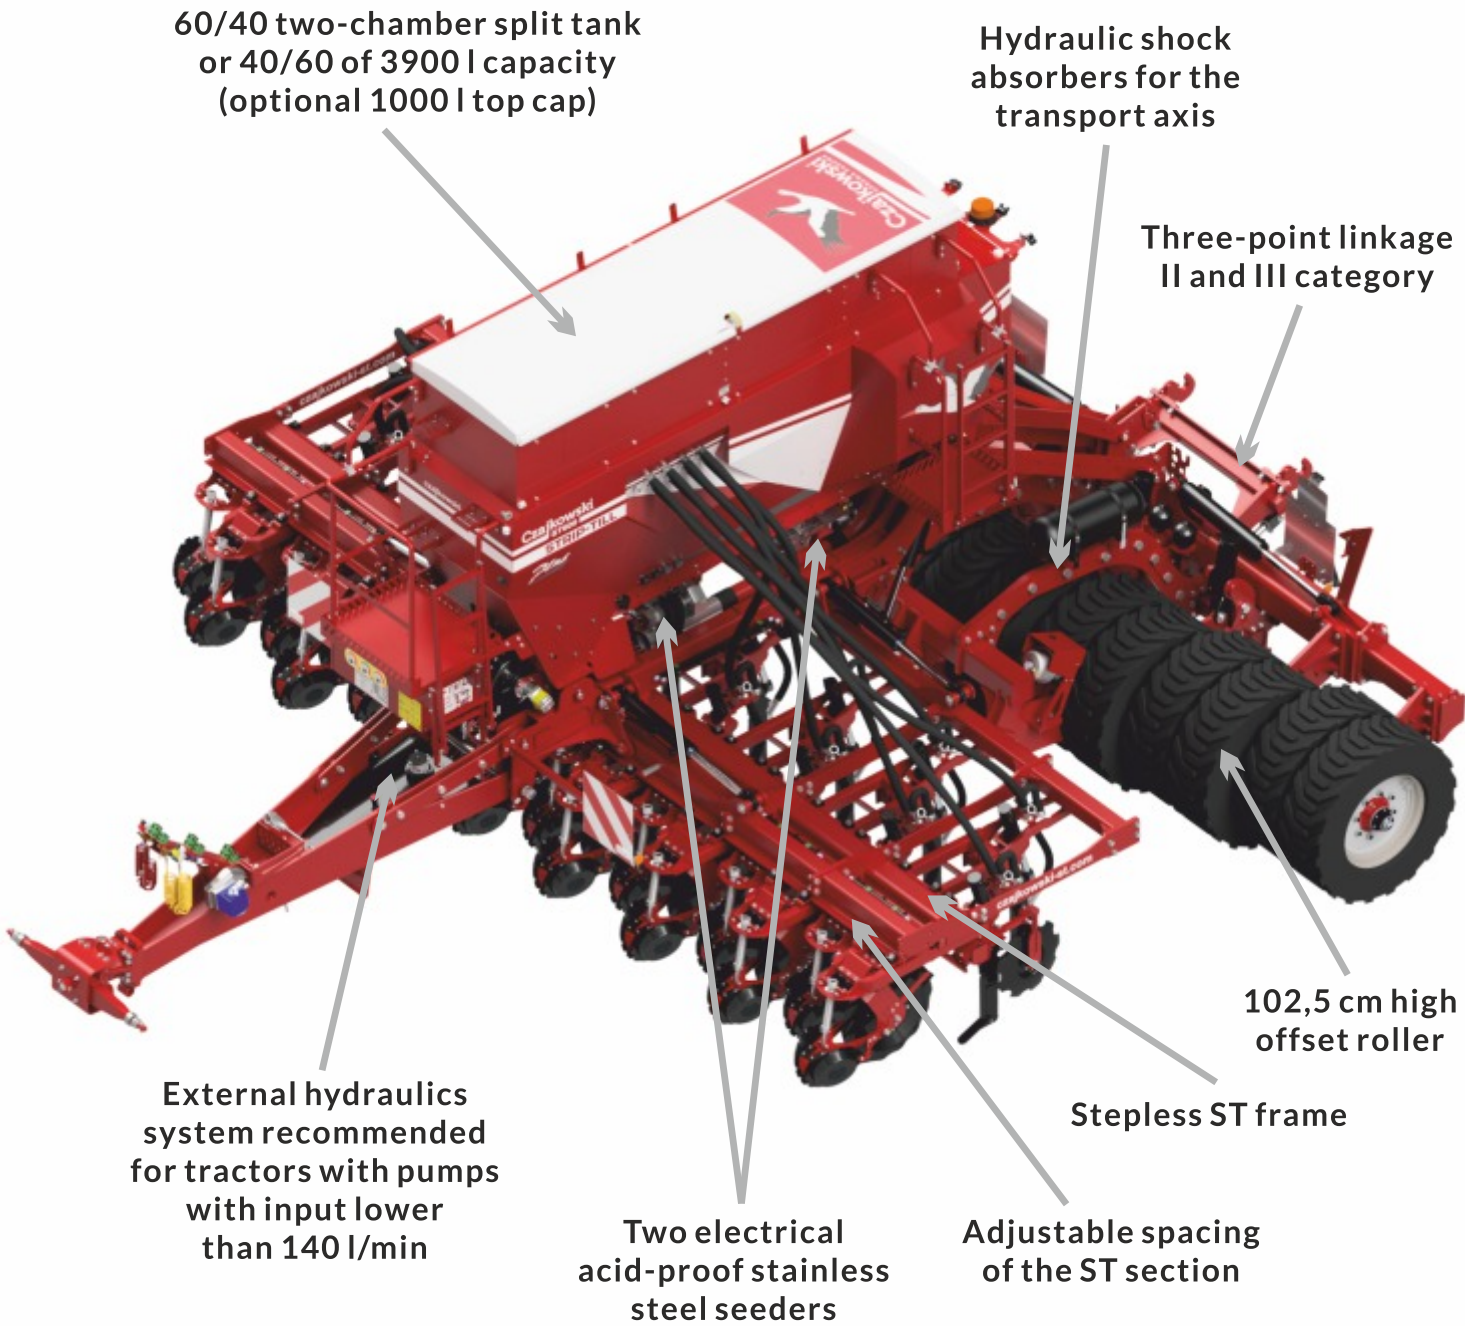

ST 400/450



ST 600

TECHNICAL SPECIFICATION

Spacing	ST 300 8R	ST 400 10R	ST 450 12R	ST 600 14R	ST 600 16R
8 x 37,5 cm (grains, rapeseed)	☒	☒	☒	☒	☒
6 x 45 cm (beet, rapeseed)	☒	☒	☒	☒	☒
6 x 50 cm (soybean)	☒	☒	☒	☒	☒
4 x 70 cm / 4 x 75 cm (corn, sunflower)	☒	☒	☒	☒	☒
6 x 70 cm / 6 x 75 cm (corn, sunflower)	☐	☒	☒	☒	☒
10 x 40 cm (grains, rapeseed)	☐	☒	☒	☒	☒
12 x 37,5 cm (grains, rapeseed)	☐	☐	☒	☒	☒
12 x 45 cm (beet, rapeseed)	☐	☐	☐	☒	☒
12 x 50 cm (soybean)	☐	☐	☐	☒	☒
14 x 42,8 cm (grains, rapeseed)	☐	☐	☐	☒	☒
8 x 70 cm / 8 x 75 cm (corn, sunflower)	☐	☐	☐	☒	☒
16 x 37,5 cm (grains, rapeseed)	☐	☐	☐	☐	☒

☐ - option *Plus*

Tank capacity / with top cap (l)	3900 (60%/40% or 40%/60%) / 4900 (60%/40% or 40%/60%)				
Tank filling height / with top cap (m)	2,8 / 3,2				
Number of scarifying sections	from 4 to 8	from 4 to 10	from 4 to 12	from 4 to 14	from 4 to 16
Spacing of scarifying sections	stepless				
Working depth (cm)	from 20 to 35				
Minimum power supply (HP)	200	250	280	320	360
Roller Ø (cm)	102.5				
Seeders	2 x electrical				
Hydraulic connectors	4 or 5 pairs + slow flow				
Rear three-point linkage (lifting)	cat II or cat. III (4500kg)				
Rear PTO	hydraulic				
Power supply	12 V				
Hydraulic filter (pcs.)	2				
Hitch type	beam, cat. III				
Transport width (m)	3				
Transport height (m)	3,90				
Transport length (m)	8,40				
Weight (kg)	7900-10300	9100-11500	9550-12000	10000-1300	11400-14000